



DUMBBELL MX-4000 is a robust LED lighting unit designed for reliable performance in harsh environmental and climatic conditions. All components use corrosion-, wear- and impact-resistant materials for a long service life.

Its flexible mounting system supports secure indoor and outdoor installation on walls, ceilings, towers, poles and hard-to-reach locations.

High optical performance delivers the required illumination, while electronic protection supports system safety against voltage surges. The mechanical design withstands impact and demanding operating conditions.

Galvanised metal parts and corrosion- and wear-resistant coatings on fasteners help preserve structural integrity and surface protection over long-term use.

Powered by Nichia LEDs



AC-DIRECT™
ALTERNATING CURRENT DIRECT DRIVER



IP68

NICHIA
LED

10°-90°
120°

AC

LONG
LIFE

DIMMABLE

IK
09T

no
UV

CE

ALU.

cos φ 0.99
100% PF

CRI
80+

RoHS

Energy
Saver


no
IR

5 Years
Warranty
Parts & Labour
MAX

5 Years
Warranty
Parts & Labour
MAX


5 Years
Warranty
Parts & Labour
MAX

General Information



Model / variant	MX-4000-600A	MX-4000-600AL	MX-4000-600D	MX-4000-600DL
Product number	27M001818	27M001819	27M001820	27M001821
Product type	LED floodlight			
Dimensions - H × W × L	415 × 150 × 630 mm			
Housing / material	Aluminium (AL6063) / Galvanised			
Weight	15.00 kg	15.00 kg	17.50 kg	17.50 kg
Colour / RAL	Matt black / 9005 • Matt red / 3020			
Minimum order	1 unit			

Technical Specifications

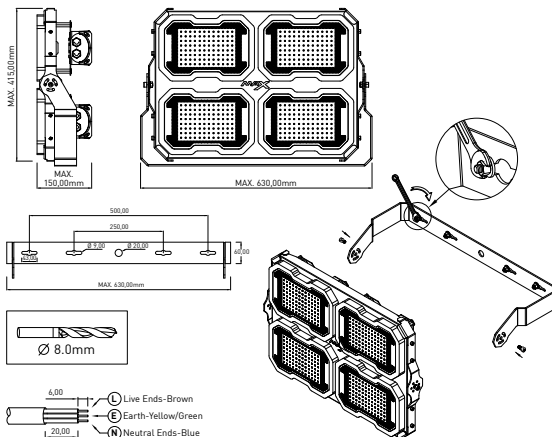

Power (@ 240 VAC)	600 W (±5%)			
Input voltage	240 VAC			
Luminous flux	90,000 lm			
Luminous efficacy	150 lm/W			
Beam angle	120°	10°-90°	120°	10°-90°
Colour temperature	2000 ~ 6500 K			
Colour rendering index (CRI)	>80			
Power factor (cos φ)	0.98			
IP rating	IP68			
Operating temperature	-35 °C ~ +65 °C			
Product lifetime	25 Years			
Warranty	5 Years			
LED type / quantity	Nichia SMD 3030 / 512 pcs			
Power supply system	AC Direct™ (A / AL) • External driver (D / DL)			
Power supply brand	MAX	MAX	OEM	OEM
Electrical junction box	Hensel DK0100G			
Connection cable	External; min. 3 × 1.00 mm² H05RN-F			
Compliance / standard	CE, RoHS, TS EN 60598-2-5			
Management systems	ISO 9001 / ISO 14001 / ISO 45001			

Installation, commissioning, maintenance and dismantling require qualified personnel and compliance with applicable electrical and workplace safety rules. The MAX Lighting brand and product patent/design rights belong to STAR ENDÜSTRİ A.Ş. Made in Türkiye with 100% Turkish capital.